

519, 340

10/519340

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003520 A1

- (51) International Patent Classification⁷: **G01N 15/02**, 15/04
- (74) Agent: **COHEN, Alan, Nicol**; 2 Grove Place, Tatsfield, Nr. Westerham, Kent TN16 2BB (GB).
- (21) International Application Number: **PCT/GB2003/002775**
- (22) International Filing Date: **30 June 2003 (30.06.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0215003.5 **28 June 2002 (28.06.2002)** **GB**
- (71) Applicant (*for all designated States except US*): **WRAS TECHNOLOGY LIMITED** [GB/GB]; Middlesex University, Bounds Green Road, London N11 2NQ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **GORBUNOV, Boris, Zachar** [GB/GB]; 20 Kings Park, Canterbury, Kent CT1 1QH (GB). **PRIEST, Nicholas, Derham** [GB/GB]; Sandacres, Gainfield, Buckland, Oxfordshire SN7 8QQ (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *with international search report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: TWO-STAGE PARTICLE-SIZE ANALYSER

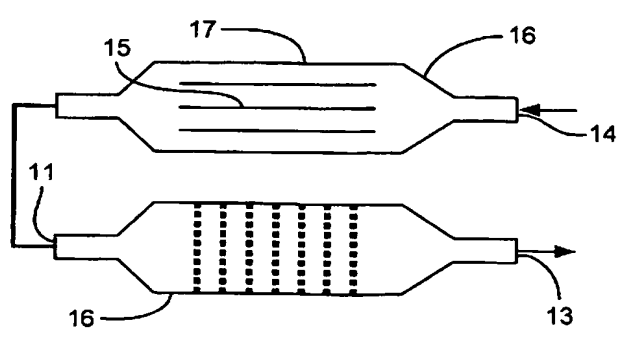

(57) Abstract: A particle collector and sampler for use with aerosols which has a first collector for larger particles and a second a collector which is a net collector for smaller particles. The system includes humidity control.

WO 2004/003520 A1

- 1 -

TWO-STAGE PARTICLE-SIZE ANALYSER

5 The present invention relates to a method and apparatus for collecting particles suspended in a fluid.

Collecting the particulate matter suspended in a fluid, e.g. air, is an important stage of air quality assessment, atmospheric science and aerosol technology, and particles collected from a fluid are analysed by various chemical and physical methods for
10 particulate matter characterisation.

There are two methods of particle characterisation (i) bulk analysis and (ii) size selective analysis. The latter usually involves describing the particle size distributions and so the size selective collection of particles is an important stage in their
15 characterisation and the present invention relates to the size selection of particles.

A known method of characterising aerosol particles size distributions is based on the deposition of particles onto substrates in a cascade impactor and further analysis of the deposits (e.g. by gravimetric or chemical analysis). In a cascade impactor
20 particles of different sizes are collected onto different substrates due to the difference in their inertia. The selectivity of deposition is achieved by means of a number of air jets with specific aerodynamic characteristics. Each stage of an impactor has a different jet facing the substrate where particles are collected. Thus, an impactor enables a set of mass concentrations in various size ranges (size sections) to be
25 obtained.

Usually a cascade impactor is used to collect particles larger than 0.3 μm . This method has a limitation and it is very difficult to apply it to particles smaller than 0.3 μm .

30

- 2 -

Another method relevant to obtaining aerosol size distributions is the deposition of aerosol particles onto a fibre or membrane filter. In this method a size selective inlet is often used to remove particles larger than a certain size, e.g. 10 μm . All particles passed through the inlet are collected onto a filter and are analysed later. This method is simpler to use than cascade impactors. Various size selective inlets are used along with a filter to sample the mass fraction of an aerosol; for instance PM_{10} , $\text{PM}_{2.5}$ or PM_1 (where the figure indicates the cut off aerodynamic diameter of the inlet). The filter method enables a wide range of particles to be collected, even particles smaller than 0.3 μm . However it has a limited capability for obtaining information about particle sizes and, in particular, the major drawback of this method is its inability to deliver the size resolved information so size distributions of the particulate matter cannot be obtained with this technique.

We have devised an improved method and apparatus for collecting particles from a fluid.

According to the invention there is provided a method for selective deposition of suspended particles from a fluid which method comprises passing the fluid sequentially over a first collector adapted to collect larger particles and then over a second collector adapted to collect smaller particles, which second collector comprises a chamber in which there is at least one net or another material containing fibres placed across the chamber.

The invention also provides a particle collector for collecting and sampling particles in a fluid which comprises sequentially (i) an inlet, (ii) a first collector adapted to collect larger particles and (iii) a second collector adapted to collect smaller particles comprising a chamber in which there is at least one net placed across the chamber and a flows means able to sustain a flow of fluid sequentially through the inlet, first collector and second collector.

30

- 3 -

The nets can be any structure which has the equivalent effect to nets, e.g. can be woven, knitted or formed of fibres so that the effect is similar to nets in removing particles; for example they can also be rigid or semi rigid.

- 5 By larger particles is meant particles larger than those collected in the second collector. In general this will mean particles of sizes above about 0.3 μm .

There optionally can be further collecting media through which the fluid subsequently will flow in use.

10

Preferably the first collector comprises a cascade impactor or a sedimentation cell, e.g. containing set of parallel horizontal partitions.

15

The second collection collector can comprise at least one net and preferably at least two nets of different mesh sizes mounted within a container, so that the fluid passes sequentially through the nets. There can be three, four, five or more nets.

20

Thus, particles of different sizes are collected on different nets. In a four net construction for example the first net faces the flow and collects the largest particles, e.g. greater than 100 nm; the particles smaller than 10 nm penetrate through the first net; the second net collects the particles in the size range from 10 to 30 nm; the particles smaller than 30 nm but larger than 10nm penetrate through the second net and they are collected by the third net; particles smaller than 10nm (e.g. from 1 to 10 nm) are collected by the fourth net.

25

The nets can be either identical or different. Different nets can be used to increase the size range of particles to be deposited. For example the first net can have a mesh opening of 120 μm ; the second net can have a mesh opening of 40 μm ; the third net can have a mesh opening of 20 μm and the fourth net can have a mesh opening of 10 μm .

30

The net sampling is applicable only for sub-micron size particles, for instance for particles smaller than about 0.3 μm . So the first collecting collector preferably collects particles above this size.

5

When a sedimentation cell with a plurality of partitions is used as the first collector, the particles are separated due to gravitational settling onto the partitions and can be analysed later. The sedimentation of particles depends on their size. Thus analysing the different parts of the pile of partitions make it possible to obtain additional information about the size distribution of the particles.

10

Preferably the collection of particles on the net(s) takes place at controlled humidity and preferably there is a humidity control unit which is incorporated between the inlet and the large particle collector.

15

The invention is suitable for use with aerosols and, in use with an aerosol, the aerosol particles are introduced into the inlet and after that go into the first section of the first collector (e.g. the first stage of the cascade impactor). A fraction of particles of the higher collection ability is collected by the first stage. The rest of the particles goes further with the flow and is deposited onto the next stages. Every stage collects particles of certain sizes. After passing all the stages of the cascade impactor, the flow goes into the net sampler where smaller particles are deposited according to their efficiency. A fraction of particles of the higher collection ability is collected by the first net. The rest of particles goes further and is collected by the next nets.

20

25

The invention enables there to be delivered size resolved information so a much more accurate method size distribution of the particulate matter can be obtained with this technique and it was very surprising that the combination of the two different separators gives such improved results.

30

- 5 -

The invention is illustrated in the accompanying drawings in which

Fig. 1 shows an existing collector,

Fig. 2 shows schematically a net collector which can be used,

- 5 Fig. 3 shows schematically a simple collector according to the invention and
Fig. 4 shows schematically a more detailed collector according to the invention.

Referring to fig. 1, existing collectors for use with aerosols comprise a size selective
preseparator (21) (e.g. a cyclone with 10 μm cut off aerodynamic size), inlet (22),
10 filter (23) and outlet (24).

In use the aerosol passes through cyclone preseparator (21) which collects particles
above 10 μm and the aerosol particles pass through inlet (22) and are then deposited
onto a fibre or membrane filter (23) and the air then passes out through outlet (24).
15 All the particles which have passed through the inlet are collected onto the filter and
are analysed later.

Referring to fig. 2 which shows a net collector, there is a container (16) with inlet
(11), nets (12) and outlet (13). In use particles of different sizes are collected on
20 different nets. Seven nets are shown for illustration with the first net facing the flow,
but in a four net construction; for example the first net faces the flow and collects the
largest particles e.g. greater than 100 nm; the particles smaller than 10 nm penetrate
through the first net; the second net collects the particles in the size range from 10 to
30 nm; the particles smaller than 30 nm but larger than 10nm penetrate through the
25 second net and they are collected by the third net; particles smaller than 10nm (e.g.
from 1 to 10 nm) are collected by the fourth net. The particles can be removed from
the net and analysed which makes it possible to obtain additional information about
the size distribution of aerosol particles.

- 6 -

Referring to fig. 3 there is a sedimentation cell (17) containing horizontal partitions (15) and inlets and outlets (14), (11), and (13).

5 In use the particles are separated in separator (17) due to gravitational settling onto the partitions (15) and these particles can be analysed later. The sedimentation of particles depends on their size. Thus analysing the different parts of the pile of partitions makes it possible to obtain additional information about the size distribution of aerosol particles. After leaving (17) the fluid passes through inlet (11) to net separator (16) which functions are as described in fig. 2.

10

Referring to fig. 4, this illustrates a wide range of aerosol samplers designed to collect selectively aerosol particles in a wide range of sizes from 1nm to 30 μm aerodynamic diameter under a constant controlled humidity. The flow rate is from 1 to 30 l/min and the sampling humidity (inside the sampling system) is from 30 to 95%.

15

The collector and sampling system consists of a net sampler (1), humidity control unit (2), cascade impactor (3), aerosol chamber (4), inlet (5), flow meter (6), saturator (7), pump (8) and outlet (9) with aerosol filter.

20 In use this system provides sampling under a constant humidity that could be set using the humidity control unit button on humidity control unit (2). Aerosol enters the saturator (7) through the inlet (5). After the saturator the aerosol goes into the aerosol chamber (4) where water vapour condenses onto particles. The chamber (4) is connected to the humidity control unit (2). If humidity is lower than required the
25 heater in the saturator is turned on by the humidity controller. It gives more water vapour and humidity is increased.

After the humidity control unit (2) aerosol enters the cascade impactor (3) where particles larger than 0.25 μm are collected onto impactor slides: Microscope Slides
30 (Size 76 x 26 mm; thickness 1.0 -1.2 mm). The particles smaller than 0.25 μm are

- 7 -

then collected by the net sampler (1). The particles can then be analysed according to their size and the size distribution is calculated.

The cascade impactor

5

The size bands of a cascade impactor are influenced by the flow rate. At the flow rate 20 l/min 50% particle retention efficiency, aerodynamic diameters are shown in Table 1.

10 Table 1. 50% Particle Retention Efficiency aerodynamic diameters for May cascade impactor used in the prototype

Impactor stage number	1	2	3	4	5	6	7
50% Particle retention efficiency aerodynamic diameter, μm	20	8	4	2	1	0.5	0.25

15 The net sampler

There are two options shown as examples:

- (i) the basic configuration of the net sampler with 4 size sections and
- (ii) 8-section net sampler.

20

At the flow rate 20 l/min maximal collection efficiency aerodynamic diameters for the basic configuration of the net sampler are shown in Table 2.

25

- 8 -

Table 2. Maximal collection efficiency aerodynamic diameters for the basic configuration of the net sampler

Net sampler section number	1	2	3	4
Maximal collection efficiency aerodynamic diameter, nm and (μm)	128 (0.128)	32 (0.032)	8 (0.008)	2 (0.002)

5

Maximal collection efficiency aerodynamic diameters (at the flow rate 20 l/min) for 8-section net sampler are shown in Table 3.

Table 3. Maximal collection efficiency aerodynamic diameters for 8-section net sampler

10

Net sampler section number	1	2	3	4	5	6	7	8
Maximal collection efficiency aerodynamic diameter, nm	128	64	32	16	8	4	2	1

The deposits on nets can be analysed separately. The size distribution of an aerosol is determined from chemical analysis or gravimetical measurements.

15

Claims

1. A particle collector for collecting and sampling particles in a fluid in which particles are collected on a collector characterised in that the collector comprises sequentially (i) an inlet (5), (ii) a first collector (3) adapted to collect larger particles and (iii) a second collector (1) adapted to collect smaller particles which second collector comprises a chamber in which there is at least one net or another material containing fibres placed across the chamber and a flow means able to sustain a flow of fluid sequentially through the inlet, first collector and second collector.
2. A particle collector as claimed in claim 1 characterised in that the first collector (3) is adapted to collect particles larger than $0.3\mu\text{m}$ and the second collector is adapted to collect particles smaller than $0.3\mu\text{m}$.
3. A particle collector according to claim 1 or 2 characterised in that there is a humidity control unit (2) incorporated between the inlet (5) and the large particle collector (3).
4. A particle collector according to any one of claims 1 to 3 characterised in that the first collector (3) is selected from a cascade impactor, a plurality of cascade impactors in sequence, a sedimentation unit, a multi stage sedimentation unit, a cyclone and an array of a plurality of cyclones.
5. A particle collector according to claim 1 characterised in that the net sampler contains a plurality of nets with different mesh openings.
6. A particle collector according to claim 1 characterised in that there is a saturator located upstream of the first collector.

- 10 -

7. A particle collector according to claim 1 characterised in that there are is an optical particle counter, a dust monitor, nephelometer, aethelometer or a condensation particle counter for obtaining particle size distributions without chemical or gravimetical analysis.

5

8. A particle collector according to claim 1 characterised in that it is in combination with an ionisation unit and a mobility selective element and in that there is an aerosol neutraliser placed between the mobility selective element and the net sampler.

10 9. A method for selective deposition of suspended particles from a fluid which method comprises (i) passing the fluid sequentially over a first collector adapted to collect larger particles and (ii) over a second collector adapted to collect smaller particles, which second collector comprises a chamber characterised in that there is at least one net or another material containing fibres placed across the chamber.

15

10. A method for selective deposition of suspended particles according to claim 9 characterised in that the first collector collects particles larger than $0.3\mu\text{m}$ and the second collector collects particles smaller than $0.3\mu\text{m}$.

20 11. A method for selective deposition of suspended particles according to claim 9 characterised in that the first collector is selected from a cascade impactor, a plurality of cascade impactors in sequence, a sedimentation unit, a multi stage sedimentation unit, a cyclone and an array of a plurality of cyclones.

25 12. A particle collector according to claim 9 characterised in that the net sampler contains a plurality of nets with different mesh openings.

13. A method according to claim 9 characterised in that there is a saturator located upstream of the first collector.

30

- 11 -

14. A method according to claim 13 characterised in that the larger particles are ionised and deposited in an electric field and the charge on the particles is reduced by a neutralisation unit placed between the first collector and the second collector.

1/2

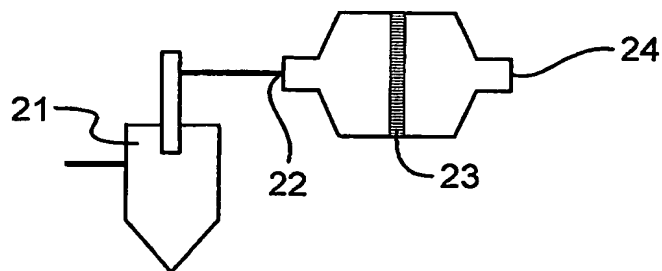


Fig. 1

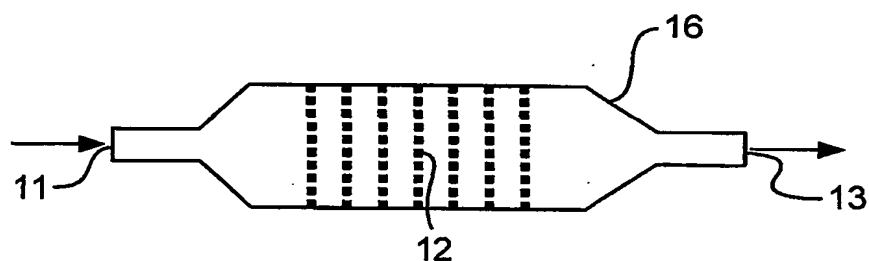


Fig. 2

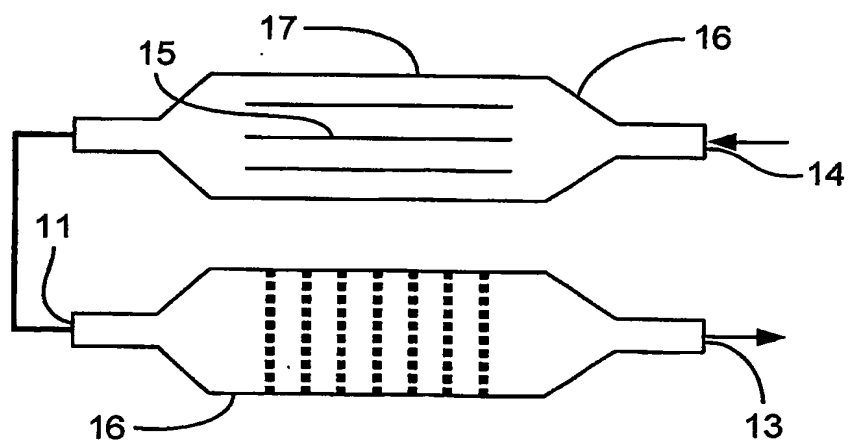


Fig. 3

2/2

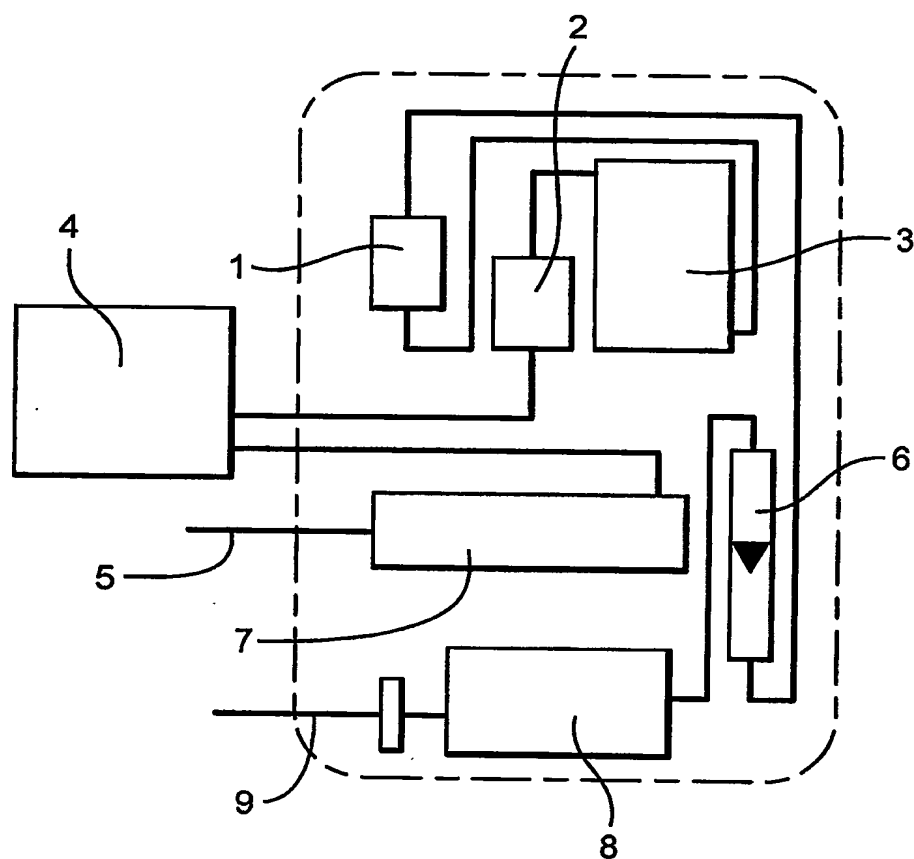


Fig.4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/02775

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N15/02 G01N15/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 041 377 A (GORBUNOV BORIS ZACHAR ;PRIEST NICHOLAS DERHAM (GB)) 4 October 2000 (2000-10-04) page 2, line 3 -page 2, line 26 page 3, line 24 -page 4, line 10 figure 3	1-5,7-12
X	US 5 932 795 A (WANG PENG-YAU ET AL) 3 August 1999 (1999-08-03) column 4, line 52 -column 5, line 36 column 16, line 12 -column 17, line 7 column 22, line 55 -column 23, line 15 column 24, line 19 -column 25, line 14 example 6 figures 1,5,6	1,3-6,8, 9,11-14



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 September 2003

Date of mailing of the international search report

07/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Koch, A

INTERNATIONAL SEARCH REPORT

Inter. Application No
PCT/GB 03/02775

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 942 297 A (JOHNSON STANLEY A ET AL) 17 July 1990 (1990-07-17) the whole document	1,2,4,5, 7,9-12
P,X	US 6 506 345 B1 (LEE YIN-NAN E ET AL) 14 January 2003 (2003-01-14) the whole document	1,3,6,9, 13

INTERNATIONAL SEARCH REPORT

mation on patent family members

Inter

Application No

PCT/GB 03/02775

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1041377	A	04-10-2000	GB 2347879 A EP 1041377 A2	20-09-2000 04-10-2000
US 5932795	A	03-08-1999	EP 0904528 A1 WO 9832001 A1	31-03-1999 23-07-1998
US 4942297	A	17-07-1990	NONE	
US 6506345	B1	14-01-2003	US 2003082825 A1	01-05-2003